

1.3 Round Pressure Cover

Type: RPDC-3A (up to 8/-1 bar)




Standard design

- Wetted material: 1.4404 (316L)
Attachment parts: 1.4301 (304)
- Stainless steel handles
- Silicone gasket
- Flanges in 3A-Sanitary Standard Design
- Neck length 150 mm, Neck thickness 4 mm
- Surface quality: inside polished $Ra < 0,8\mu\text{m}$, outside: $Ra < 1,6\mu\text{m}$
- Attachment parts and their fillet welds not polished
- With approval (Modul G) acc. PED 97/23/EC
- Design Code: AD-2000-Merkblatt

Options

- Wetted materials: 1.4435 BN2, 1.4539, 1.4529, 1.4462, 1.4429, HC-22, HC-276, HC-2000, etc.
- Intermediate sizes
- Various gasket qualities (on request)
- Neck length up to 2000 mm, neck thickness up to 20 mm
- Conical design of the neck (up to max. 8 mm neck thickness)
- Neck shaped to match tank-diameter
- Various handles: toggle, nuts etc.
- Various surface qualities (polished up to $Ra < 0,2\mu\text{m}$)
- Cover side swiveling
- With wedge for side installation
- Locking pin in open position
- Springassist (torsion-, disc-, oder gasspring)
- Installation of nozzles (sightglasses, TC-ferrules (DIN32676), HZ-Connect, etc.)
- With various limit- or proximity-switches
- With safety-grill or safety-cross
- Attachment parts in other materials
- Various Design Codes: ASME VIII-1, EN13445, ...
- Optional with ASME-Approval Sec. VIII-1, latest Edition (additional surcharge, design-changes possible)

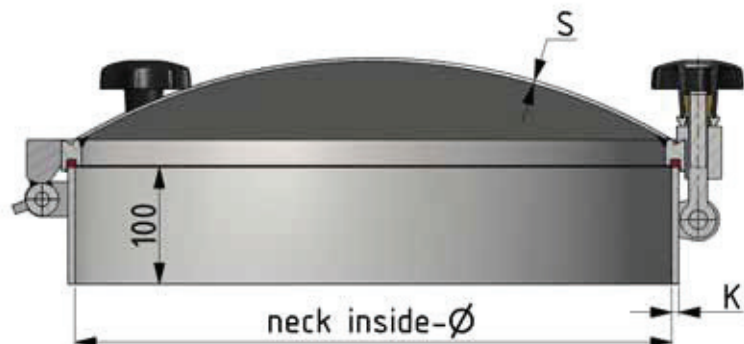

zimmerlin
EDELSTAHL-TECHNIK



Zimmerlin GmbH
Edelstahl-Technik
Frohmatenstr. 19
D-79268 Bötzingen

Tel. +49(0)7663-6088-0
Fax +49(0)7663-6088-88
info@zimmerlin.de
www.zimmerlin.de

Stand: Juni 2015



Article No.	NW	MAWP [bar]	max. temperature [°C]	Number of screws M16	Total height [mm]	S for 1.4571	Weight [kg]	Price in EUR
24642006-3A	460	4	200	6	240	5	30	
24662008-3A	460	6	200	8	240	6	34	
24682010-3A	460	8	200	10	240	8	39	
25032006-3A	500	3	200	6	255	4	31	
25042008-3A	500	4	200	8	255	5	35	
25062010-3A	500	6	200	10	255	6	42	
25081512-3A	500	8	150	12	255	8	46	
26022006-3A	600	2	200	6	285	4	42	
26040508-3A	600	4	50	8	285	4	44	
26042010-3A	600	4	200	10	285	5	49	
26061512-3A	600	6	150	12	285	6	52	
26080512-3A	600	8	50	12	285	6	52	
27022006-3A	700	2	200	8	295	4	56	
27042012-3A	700	4	200	12	295	6	64	
27061516-3A	700	6	150	16	295	6	70	
27080518-3A	700	8	50	18	295	6	78	
28020508-3A	800	2	50	8	300	4	76	
28022010-3A	800	2	200	10	300	4	78	
28041514-3A	800	4	150	14	300	6	82	
28060518-3A	800	6	50	18	300	6	90	
28080520-3A	800	8	50	20	300	6	97	
29022010-3A	900	2	200	12	320	5	87	
29042018-3A	900	4	200	18	320	6	103	
29061022-3A	900	6	100	22	320	8	115	
29080524-3A	900	8	50	24	320	8	128	
21022012-3A	1000	2	200	12	340	5	110	
21041522-3A	1000	4	150	22	340	6	118	
21060524-3A	1000	6	50	24	340	6	125	

