

1.5 Pressure Cone Cover

up to 6/-1 bar


Standard design

- Wetted material: 1.4571 or 1.4404
Attachment parts 1.4301
- Stainless steel blind hole nuts
- Silicone gasket
- With Cone-type-swivel-hinge
- Neck length 120 mm, neck thickness 4 mm
- Outlet diameter: Ø50mm
- Surface quality: unpolished, glass-bead blasted, from NW600 unpolished, pickled
- With/without approval (Modul G) acc. PED 97/23/EC
- Design Code: AD-2000-Merkblatt (with PED)



Options

- Wetted materials: 1.4435 BN2, 1.4539, 1.4529, 1.4462, 1.4429, HC-22, HC-276, HC-2000, etc.
- Intermediate sizes
- Various apex-angles
- Various outlet-diameters (min Ø40mm)
- Various gasket qualities
- Neck length up to 2000 mm, neck thickness up to 20 mm
- Neck shaped to match tank-diameter
- Various surface qualities (glass-bead blasted, pickled or polished up to $Ra < 0,2\mu m$)
- Complete conical design (up to max. sheet thickness of 8mm)
- Various handles: Collar Nuts, etc.
- Installation of various outlet nozzles
- With various limit- or proximity-switches
- Attachment parts in other Materials
- Various Design Codes: ASME VIII-1, EN13445, ...
- Optional with ASME-Approval Sec. VIII-1, latest Edition (additional surcharge, design-changes possible)

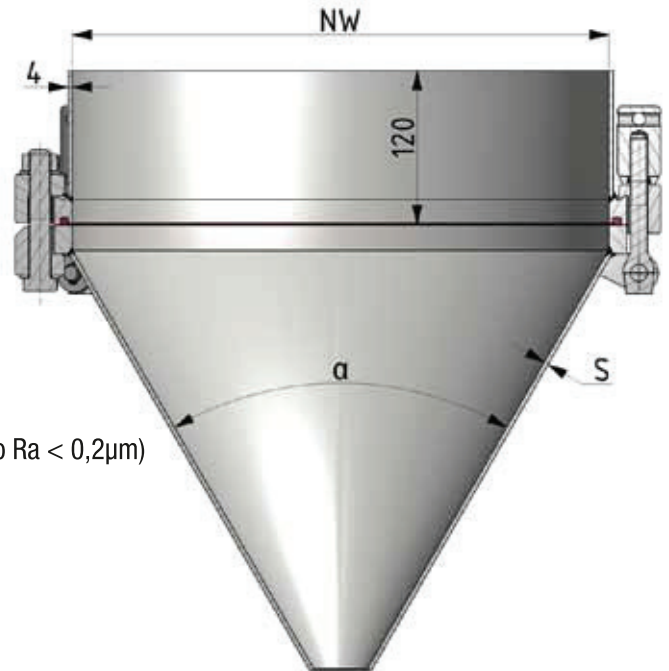

Article No.	NW/ α	MAWP [bar]	max. temperature [°C]	Number of screws M16	Total height [mm]	Cone thickness S [mm]	Weight [kg]	Price in EUR
230 060	300 / 60°	6	100	4	385	4	20	
230 090	300 / 90°	6	100	4	275	4	20	
240 060	400 / 60°	6	100	6	470	4	28	
240 090	400 / 90°	6	100	6	325	4	28	
245 060	450 / 60°	6	100	6	520	4	30	
245 090	450 / 90°	6	100	6	350	4	30	
250 060	500 / 60°	6	100	10	560	4	37	
250 090	500 / 90°	6	100	10	375	4	37	
260 060	600 / 60°	6	100	12	645	5	46	
260 090	600 / 90°	6	100	12	425	5	46	

Gaskets see chapter 9.1



Zimmerlin GmbH
Edelstahl-Technik
Frohmattenstr. 19
D-79268 Bötzingen

Tel. +49(0)7663-6088-0
Fax +49(0)7663-6088-88
info@zimmerlin.de
www.zimmerlin.de



Stand: Juni 2015